



PRESSURE SWITCH ADJUSTMENT:
Adjust in the proper sequence:
1. **Range:** Turn nut down (CW) for higher cut-in pressure, or up (CCW) for lower cut-in. (30psi)
2. **Differential:** Turn nut down (CW) for higher cut-out pressure, or up (CCW) for lower cut-out. (50psi)
Check switch operation several times after adjustment to ensure proper pressure setting.

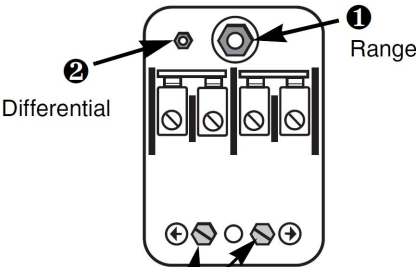

Grounding provisions: #10-32 screws.
Torque screws to 15–20 lb-in (1.7–2.3 N•m).

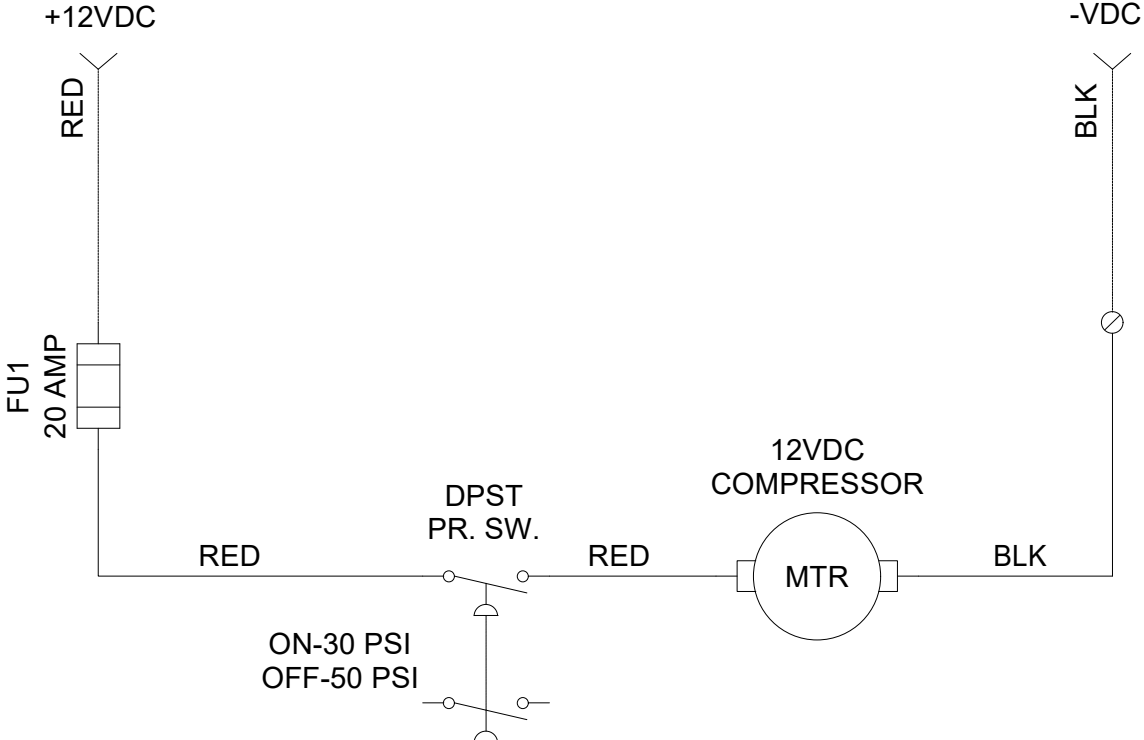

<div><div>www.loading-automation.com</div><div><div><div></div></div><div>loading automation inc</div></div><div><div>3310 ENTERPRISE DR. WILMINGTON, NC 28405</div><div>TEL 910-791-2125 FAX 910-452-3889</div></div></div> <div><div><div>joloda hydraroll</div><div>USE ONLY GENUINE HYDRAROLL PARTS</div></div><div><div>THIS DRAWING AND/OR ITS SPECIFICATIONS ARE THE PROPERTY OF LOADING AUTOMATION, INC. AND MAY NOT BE REPRODUCED IN ANY MANNER NOR THE CONTENTS DIVULGED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF LOADING AUTOMATION, INC.</div></div></div>	DRAWN: HC	7/16/2024	PROJECT: 777018 COMPRESSOR ENCLOSURE		
	CHECKED:		DESCRIPTION: ELECTRICAL DRAWING COMPRESSOR ENCLOSURE; 12V DC		
	APPROVED:				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		SIZE	PART NUMBER:	STOCK NUMBER:
ANGLES ± 0.5°	.X ± .02	.XX ± .01	.XXX ± .005	B CP-20-0000	777018
THIRD ANGLE PROJECTION		WEIGHT		SCALE	1/2
MATERIAL		8.713 kg		SHEET 2 OF 2	